


Model: AC5 ELEGANT 1L HONEY

Codes: 100316396

Group: G-210

Format: 19,3X138,3X0,8CM

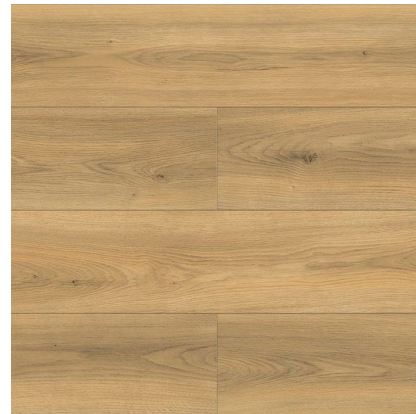











COMPOSITION



	Size	Material	Type of material
Layer 1	0.2	Melamine	Aminoplastic thermosetting resins
Layer 2	0.2	Decorative paper	
Layer 3	7.5	HDF	High density fibre board
Layer 4		Backside	Kraft paper sheets soaked in phenolic resins

FEATURES

-  Imitates the surface of wood
-  Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
-  25 25 year warranty for domestic use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
-  Is suitable for installing on water radiant heating
-  23. Intensive residential
-  ACS Abrasion-resistance level as per Standard UNE-EN 13329
-  Beveled cut on all 4 edges of the board for emphasizing size
-  5 5 year warranty for commercial use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
-  Format where only one board has been used to finish the entire base surface
-  PEFC PanEuropean Forest Certification that guarantees to consumers the origin of the products from sustainably managed forests
-  33. Intensive commercial
-  Suitable for bathroom and kitchen floors for residential use, provided that the product's installation instructions are always followed.

DIMENSIONAL FEATURES

Item thickness	≤0.50 MM	EN 13329*
Width of face	≤0.9 mm	EN 13329*
Squareness of the item (q)	≤0.20 MM	EN 13329*
Difference in height among items	≤0.15 mm	EN 13329*
Uv light fastness	≥4	EN 438-2,16*
Surface stripping	≥1.00 MM	EN 13329 Anexo D*



LABORATORY TESTS

Resistance to abrasion	AC5	UNE EN 13329:2000*
Impact resistance	≥1000 mm/≥15 N	EN 13329*
Resistance to staining	Grado 5 (G 1 y 2) y Grado 4 (G 3)	EN 438*
Resistance to cigarette burns	4	EN 438*
Swelling in thickness	≤12%	EN 13329*
Dimensional stability	≤0.90 mm	EN 13329*
Formaldehyde emissions	E1	DIN EN 120*
Slip resistance (pendulum-wet)	CL 1 (32)	UNE 41901*
Tensile strength of joints	>1.0 kN/m	EN 13329*
Fire resistance	Cfl-s1	EN 13501*
Heat resistance	R=0.078 m2 K/W M2*K/W	UNE-EN 12667:2002*
Thermal conductivity	0.17 W/mk	DIN 52612*
Slip resistance (dcof)	0.63	ANSI A137.1*
Density of the board	885 ±5 KG/M3	UNE EN 323*
Slip resistance (pendulum-dry)	CL 3 (52)	UNE 41902*

PACKING

Sales units per box	2.402256 M2/BOX
Sales units per pallet	124.917293 M2/PAL
Sales units per unit	0.266917 M2/PIECE
Sale unit	M2
Base unit	ST
Sales units per square meter	1 M2
Net weight	7.669042 KG/M2
Gross weight	7.845127 KG/M2

SPECIAL PIECES

SAP	Description	Group	Boxes	Pallet	Units	SKU	Basic Unit	Net Weight	Gross weight
100320654	IGUALACION ELEGANT 1L HONEY 4X270X1	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.7 KG/PIECES	0.72 KG/PIECES
100320615	MAMPERLAN AC5 ELEGANT 1L HONEY 7X120	G-163	2 PIECES/BOX	200 PIECES/PAL	11.9 PIECES/M2	-	-	1.58 KG/PIECES	1.64 KG/PIECES
100320661	TRANSICION ELEGANT 1L HONEY 4X270X1	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.7 KG/PIECES	0.72 KG/PIECES
100320647	ZOCALO ELEGANT 1L HONEY 8X225X1,4	G-107	12 PIECES/BOX	648 PIECES/PAL	5.56 PIECES/M2	-	-	1.57 KG/PIECES	1.62 KG/PIECES

