


Model: VIOLA ROSSE SILK 120X250(6)(A)

Codes: 100288092

Absorption: Bla - Porcelánico (E<=0.1%)

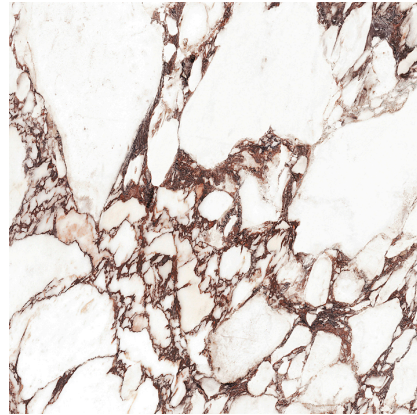

## DIMENSIONAL FEATURES

UNE-EN ISO 10545-2

|                             |             |          |
|-----------------------------|-------------|----------|
| Length                      | 2500 MM     |          |
| Thickness                   | 6 MM        |          |
| Width                       | 1200 MM     |          |
| Length and width deviation  | Below 0.15% | +/-0.3%* |
| Side straightness deviation | Below 0.15% | +/-0.3%* |
| Squareness deviation        | Below 0.15% | +/-0.3%* |
| Surface flatness deviation  | Below 0.15% | +/-0.4%* |

\*ISO-13006:2015 UNE-EN 14411:2017

## MECHANICAL FEATURES

UNE-EN ISO 10545-4-6-7-11

|                     |           |  |
|---------------------|-----------|--|
| Breaking strenght   | >1100 N   |  |
| Modulus of rupture  | >45 N/MM2 |  |
| Abrasion resistance | <140      |  |

\*ISO-13006:2015 UNE-EN 14411:2017

## HYGIENIC FEATURES

UNE-EN ISO 10545-13-14

|                     |         |  |
|---------------------|---------|--|
| Chemical resistance | CLASE A |  |
| Stain resistance    | 5       |  |

\*ISO-13006:2015 UNE-EN 14411:2017

## ANTI-SLIP VALUE

CEN/TS 41901/02, DIN-51130 y ASTM A137.1

|                                |                        |  |
|--------------------------------|------------------------|--|
| Slip resistance (pendulum-wet) | CL0                    |  |
| Stain resistance               | 5                      |  |
| 4s                             | DRY>36-LOW_WET<25-HIGH |  |
| Slip resistance (pendulum-dry) | >45                    |  |

\*ISO-13006:2015 UNE-EN 14411:2017

## SCOPE OF USE

|                  |                     |  |
|------------------|---------------------|--|
| Technical code-1 | Use on walls        |  |
| Technical code-2 | Dry interior floors |  |

System Certification



Do not use cleaning agents containing hydrofluoric acid.

It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.

For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double gluing technique.

Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.

## PACKING

|                        |            |
|------------------------|------------|
| Sales units per box    | 3 M2/BOX   |
| Sales units per pallet | 66 M2/PAL  |
| Sales units per unit   | 3 M2/PIECE |

### System Certification



Do not use cleaning agents containing hydrofluoric acid.  
It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.  
For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double glueing technique.  
Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.